

An Analysis of Non-Linear Contrast Enhancement Methods of Digital Image



Thillai Sivakavi Saravanan, Shenbaga Priya V

Abstract: Digital image distinction sweetening is that the technique of enhancing the character of the digital image by using varied strategies so as to seem higher. Image distinction sweetening techniques are divided into Linear and Non-Linear distinction sweetening. Linear distinction sweetening works by increasing the first input worth of the info associate degree Non-linear distinction sweetening normally works by utilizing bar graph feat through the utilization of an rule. This paper analyses the non-linear distinction sweetening techniques in terms of image sweetening. From the analysis, it's found that bar graph feat outperforms alternative non-linear distinction sweetening techniques.

Keywords: Image Enhancement, Non-Linear contrast Enhancement, Contrast Enhancement, Histogram Equalization.

I. INTRODUCTION

Image distinction improvement may be a established approach and crucial application in image process technology. the most intention of image improvement is to improvise visual impact of a picture so as to construct a picture for easier understanding and for higher recognition. the improved image plays a big role in several applications like medical image process, remote sensing image analysis, automatic character recognition, microscopic imaging and lots of different areas [1]. The brightness value's place a picture is distinction. to extend the distinction in a picture, the vary of brightness worth must be modified. distinction improvement technique develops the image options leap out accurately and fewer imprecise supported the colors accessible on the digital worth of the image [2][12].

Generally distinction sweetening technique constructs a lot of competent results. several techniques square measure offered for distinction sweetening and also the most generally used techniques for distinction sweetening square measure

divided into linear and non-linear techniques [3][13]. Linear distinction sweetening technique linearly expands the particular digital price of the image. the complete vary of sensitivity is used whereas increasing the particular input price of a picture. therefore there'll be delicate variations inside the info. The 3 ways of linear distinction sweetening square measure Min-Max Linear distinction Stretch, proportion Linear distinction Stretch, and Piecewise Linear distinction Stretch. The non-linear distinction sweetening technique utilizes bar chart leveling by victimisation associate algorithmic rule. The ways of non-linear distinction sweetening square measure bar chart leveling, adaptive bar chart leveling, Homomorphic Filter, and Unsharp Masking [3][4][13].

II. NON-LINEAR CONTRAST ENHANCEMENT METHODS

Non-linear distinction improvement could be a technique supported bar graph equalization through by using AN algorithmic rule. The four ways of non-linear distinction improvement are:

- Histogram Equalization
- Adaptive Histogram Equalization
- Homomorphic Filter
- Unsharpmasking

A. Histogram Equalization

Histogram equalisation (HE) [5] is often operated technique for distinction improvement. In sensible distinction image, the bar chart uniformly distributes over the complete vary of the intensity. The visual quality of the image is elevated by utilizing the HE. In HE technique the vary of bar chart is extended by applying the worth of chance Density Function(PDF) of the image. The HE has several blessings like economical computation, quicker in manufacturing results and it's extremely applicable for real time pictures [6].

Consider an image $I = \{(i,j)\}$ with Y discrete gray values $(I_0, I_1, I_2, \dots, I_{Y-1})$. Then the Probability Density Function(PDF) $P(I_k)$ of the given image is expressed as

$$P(I_k) = \frac{n_k}{N} \tag{1}$$

Where n_k depicts the number of apperance of gray level in I. N is the sum of pixels in the image I. The Cumulative Distribution Function (CDF) corresponding to $P(I_k)$ is expressed as:

Manuscript received on April 02, 2020.
Revised Manuscript received on April 15, 2020.
Manuscript published on May 30, 2020.
* Correspondence Author

Thillai Sivakavi Saravanan¹, Department of Information Technology, Panimalar Institute of Technology, No.391, Bangalore Trunk Road, Varadharajapuram, Poonamallee, Chennai - 600 123, Tamil Nadu, India. Email: thillaisivakavi75@gmail.com

Shenbaga Priya V², Department of Computer Science, Computer Applications School of Computer Information and Mathematical Sciences B.S. Abdur Rahman Crescent Institute of Science & Technology Seethakathi Estate GST Road(Chennai-Trichy National Highway, NH45, Vandalur, Tamil Nadu 600048, India. Email: vpriyanarayanan@gmail.com

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an [open access](https://creativecommons.org/licenses/by-nc-nd/4.0/) article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>)

$$C(I) = \sum_{j=0}^k P(I_j) \quad (2)$$

Where I is I_k for k=0,1,...Y-1 and 0 ≤ C(I_k) ≤ 1.

By using the CDF, HE maps the given input image into the entire dynamic range (I₀, I_{Y-1}) as a level transformation function [11] and function f(I) based on the CDF is defined as:

$$f(I) = I_0 + (I_{Y-1} - I_0)C(I) \quad (3)$$

The output of contrast enhanced image based on the technique Histogram Equalization is shown in the figure 1.

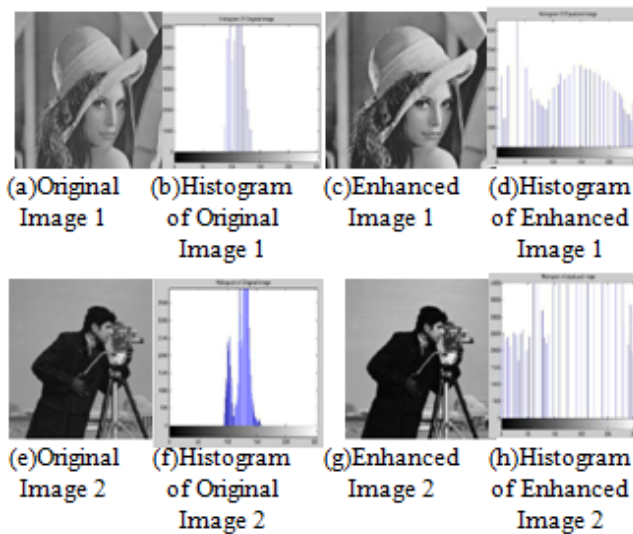


Figure 1 Output of Histogram Equalized Enhancement

B. Adaptive Histogram Equalization

Adaptive histogram equalisation (AHE) is associate extension of HE and it works by using the HE mapping perform on native window to notice every elevated density price.

Here it divides the image into range of windows and therefore the transformation perform is applied to every native window of grey scale image. so the results of transformation perform and accumulative Distribution perform (CDF) of neighbourhood values ar proportional and therefore the distinction within the native region is increased. If there's an additional sweetening want then the bar chart of given pixels neighbour needs to be changed. it'll end in most distinction sweetening.

Thus the ensuing transformation functions and of picture element values within the neighbourhood ar proportional [7] and therefore the distinction in every native window is increased. If the image want the any distinction sweetening domestically, then bar chart modification needs to be applied to every given picture element by victimization the bar chart of neighbor picture element for optimum distinction

sweetening [8][14].

C. Homomorphic Filter

Homomorphic filter functions by rising the high frequencies and controls the low frequencies. thus the distinction within the illumination is suppressed at a similar time the sides

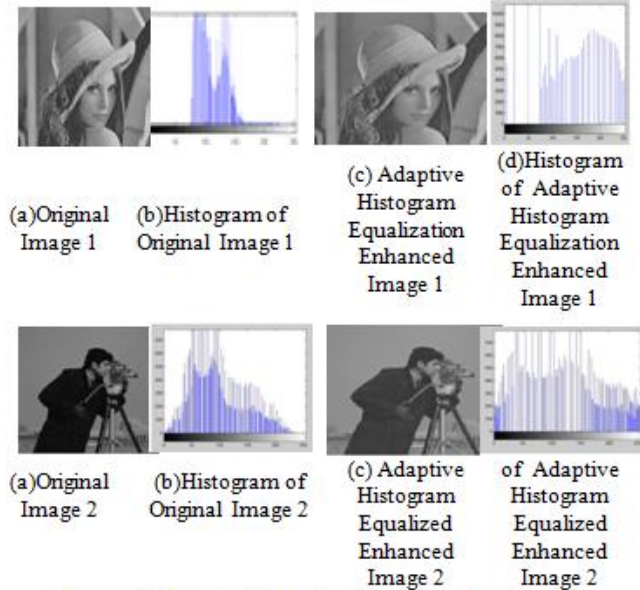


Figure 2 Output of Adaptive Histogram Equalized Enhancement

details ar preserved. usually the character of the illumination is uniform and gains low-frequency parts within the Fourier rework of the image. The changes of the coefficient operate can cause precise transitions within the intensity of the image as a result of completely different materials imaged next to every alternative. These precise changes ar combined with high frequency parts [9]. a picture will be expressed because the combined product of the sunshine supply illumination and also the object's coefficient, and it will be developed as:

$$f(x, y) = I(x, y)\rho(x, y) \quad (4)$$

In equation four 'I' represent the intensity of the illuminating source of illumination, f represent the image and zero zero zero zero one is object's coefficient. so as to boost a picture having low distinction, the coefficient element may be boosted with the filters. to separate the 2 parts, they have to be reworked into the log domain, then increasing parts turns additive and it's described as

$$L_n(f) = l_n(I) + l_n(\rho) \quad (5)$$

Here ln(I) is low pass and ln(zero) is high pass. Then the linear filter are often applied to the additive part of a picture f = Ln(f). so as to reinforce a picture, the homomorphic filter should have a better response within the high-frequency region once scrutiny the low-frequency region and therefore the main points, within the high frequency region, are often accentuated whereas declining the illumination part. The distinction sweetening victimisation the Homomorphic filter is shown within the figure 3((b) and (d)).



Figure 3 Output of Homomorphic Filter Enhancement

D. Unsharp Masking

The basic plan of unsharp masking algorithms is to reinforce the native high frequencies. These high frequencies square measure disclosed in considering the amount of variation gift within a neighborhood window, or by suppressing the low frequencies. this concept acts as a stratum of unsharp masking and Retinex, that mimics the human sensory system. each algorithms is used as world ones or regionally reconciling ones [10].The unsharp masking is that the technique to intensify the sharpness within the image distinction. Unsharp masking is expressed by:

$$y(m,n) = f(m,n) + a * g(m,n) \quad (6)$$

Where:

f is that the given image. y is that the sharpened image and g spoken be the gradient image. a is spoken be the distinction constant bigger than zero. Figure four depicts the sweetening carried by using unsharpmasking[16].



Figure 4 Output of employing Unsharpmasking Enhancement

III. RESULTS AND DISCUSSION

In this paper an effort is created to analyse the non-linear distinction sweetening techniques. The experiments area unit processed mistreatment the tool MATLAB. The results of the techniques taken for analysis area unit portrayed in figure one,figure 2,figure three and figure four.The quantitative evaluations is completed by mistreatment Mean sq. Error (MSE) and Peak ratio (PSNR) and is expressed within the following equations (7) and (8):

The definition of MSE is:

$$MSE = \frac{1}{M \times N} \sum_{i=1}^M \sum_{j=1}^N (X'(i,j) - X(i,j))^2 \quad (7)$$

where i, j square measure the pixel's coordinates, M and N represent the peak and breadth of the image, severally, and X and X^'denotes the given and therefore the processed pictures, severally. A smaller MSE worth indicates that X and X^' square measure a lot of similar.

The PSNR is expressed by using MSE:

$$PSNR = 10 \log_{10} \left[\frac{255^2}{MSE} \right] \quad (8)$$

After careful application of the non-linear distinction improvement techniques, it's found that bar graph equalisation outperforms the opposite techniques by manufacturing higher PSNR worth and low MSE worth. The results obtained out of the four techniques for distinction improvement applications area unit shown within the following table 1.

Table1 PSNR and MSE Values of Non-Linear Contrast Enhancement Techniques

Methods	PSNR of Image 1	MSE value of Image 1	PSNR of Image 2	MSE value of Image 2
Histogram Equalization	7.277265	1.35E+04	6.91281	1.64E+04
Adaptive Histogram Equalization	6.754456	1.02E+04	6.686456	1.01E+04

Homomorphic Filters	4.324444	0.32E+04	4.456356	0.03E+04
Unsharp Masking	4.223489	0.28E+04	4.656456	0.23E+04

IV. CONCLUSION

Generally, distinction improvement ways with success improvise the low distinction pictures. during this paper, non-linear distinction improvement techniques ar analyzed. The comparison is created between the non-linear techniques like bar chart leveling, adaptative bar chart leveling, Homomorphic Filter and Unsharp Masking. The results ar analysed supported PSNR and MSE values. From the results, it's finished that the bar chart leveling technique offers the minimum MSE and better PSNR worth and outperforms the opposite technique of non-linear techniques.

ACKNOWLEDGMENT

The Authors express their heartfelt thanks to Dr. Surapaneni Krishna Mohan, Vice Principal & Professor at Panimalar Medical College Hospital & Research Institute, Chennai and Dr. Vishnu Priya V, Professor & Dr. Gayathri Rengasamy, Assistant Professor at Saveetha Dental College, Saveetha Institute of Medical and Technical Sciences (SIMATS), Saveetha University, Chennai for their constant support, encouragement and help rendered to complete this study.

REFERENCES

1. Zhuang L, Guan Y. Adaptive Image Enhancement Using Entropy-Based Sub histogram Equalization. Computational intelligence and neuroscience. 2018.
2. Mustafa WA, Kader MM. Contrast Enhancement Based on Fusion Method: A Review. In Journal of Physics: Conference Series 2018 Jun (Vol. 1019, No. 1, p. 012025). IOP Publishing.
3. Chandpa KR, Jani AM, Prajapati GI. Comparative Study of Linear and Non-linear Contrast Enhancement Techniques. International Journal of Research and Scientific Innovation.;1:37-41.
4. Al-amri SS, Kalyankar NV, Khamitkar SD. Linear and non-linear contrast enhancement image. International Journal of Computer Science and Network Security. 2010 Feb;10(2):139-43.
5. R. C. Gonzalez and R. E. Woods, Digital Image Processing, Pearson, New Delhi, India, 3rd edition, 2009.
6. Y. T. Kim, "Contrast enhancement using brightness preserving bi-histogram equalization," IEEE transactions on Consumer Electronics, vol. 43, no. 1, pp. 1–8, 1997.
7. Vidya BS, Chandra E. Triangular Fuzzy Membership-Contrast Limited Adaptive Histogram Equalization (TFM-CLAHE) for Enhancement of Multimodal Biometric Images. Wireless Personal Communications. 2019:1-30.
8. Wang Z, Tao J. A fast implementation of adaptive histogram equalization. In2006 8th international Conference on Signal Processing 2006 Nov (Vol. 2). IEEE.
9. Abbas AP, Harbi J. Image Enhancement By Using Homomorphic Filtering Model. InThe 1 st International Conference on Information Technology (ICoIT'17) 2017 Apr 10 (p. 335).
10. Polesel A, Ramponi G, Mathews VJ. Image enhancement via adaptive unsharp masking. IEEE transactions on image processing. 2000 Mar;9(3):505-10.
11. Bora DJ. Importance of image enhancement techniques in color image segmentation: a comprehensive and comparative study. arXiv preprint arXiv:1708.05081. 2017 Aug 9.
12. Maragatham G, Roomi SM. A review of image contrast enhancement methods and techniques. Research Journal of Applied Sciences, Engineering and Technology. 2015 Feb 15;9(5):309-26.

13. Bedi SS, Khandelwal R. Various image enhancement techniques-a critical review. International Journal of Advanced Research in Computer and Communication Engineering. 2013 Mar;2(3).
14. Chandrakar CL, Singhai MS. Survey of Image Contrast Enhancement Methods. International Journal of Electronics,
15. Communication & Instrumentation Engineering Research and Development (IJEICERD). 2012 Sep:56-63.
16. Zaafour A, Sayadi M, Fnaiech F. A developed unsharp masking method for images contrast enhancement. InEighth International Multi-Conference on Systems, Signals & Devices 2011 Mar 22 (pp. 1-6). IEEE.

AUTHORS PROFILE



Ms. Thillai Sivakavi Saravanan Obtained M.E in Computer Science From Panimalar Engineering College. She is currently working as Assistant Professor in the Department of Information Technology at Panimalar Institute of Technology. Her areas of interest include Robotics, Artificial Intelligence, Machine Learning and Internet of Things.



Dr. V ShenbagaPriya obtained her Ph.D. in Computer Science from Bharathiar University. She is currently working as Assistant Professor in the Department of Computer Applications at BS AbdurRahman Crescent Institute of Science and Technology. She has done M.Sc. (CS) from Madras University and M.Phil (CS) from Annamalai University. She has over 5+ years of teaching experience and 4 years of industry experience. Her areas of interest include Image Processing, Remote Sensing, Internet of Things and Software Engineering.